

3M Electronic Performance Technologies

3M™ Embedded Capacitance Material

For over a century, 3M has leveraged its technology expertise and financial stability to help its customers innovate regardless of market conditions. Now, 3M brings forward another technology to help its customers differentiate their products – 3M Embedded Capacitance Material (3M ECM).


3M ECM is an embedded capacitance material that is designed to reduce impedance, power bus noise, EMI, and discrete capacitor count for OEMs with high speed digital and low pass filter designs who are seeking to differentiate their products through dramatically improved performance and reduced size. Unlike some of the competition, 3M does not require a license and provides global direct support from design through manufacturing to provide application optimization and high board yields, resulting in cost effective yet exceptional performance.

3M ECM is a UL recognized capacitor material with high capacitive density that can be embedded into printed circuit boards and chip packaging. 3M ECM consists of a very thin layer of ceramic-filled epoxy sandwiched between two layers of copper foil. 3M ECM has demonstrated success in applications in the telecom, computer, test and measurement, military/aerospace, medical and consumer electronics industries.


Benefits

- Significantly improves performance via reduced impedance, power bus noise, and EMI
- Allows for removal of large numbers of discrete capacitors
- Increases usable board area, allowing for board size reduction
- Demonstrated to perform decoupling function better than discrete capacitors or competitive embedded capacitance materials in independent testing
- High value due to cost effective implementation, lack of 3M license requirement and strong performance
- 100% HiPOT testing
- RoHS compliant*
- No 3M license required
- Global direct support
- Extensive global fabricator network
- Fast delivery
- Demonstrated compatibility with standard PCB fabrication processes, including laser drilling
- Compatible with lead-free processing
- RA and ED copper
- Available in a variety of panel and copper sizes


3M ECM Allows for Board Size Reduction

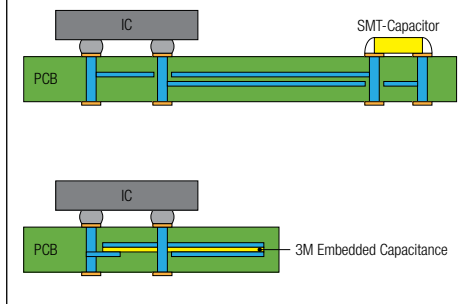

3M ECM Reduces Power Distribution Impedance

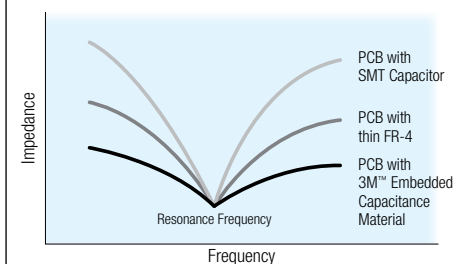

3M ECM Reduces EMI

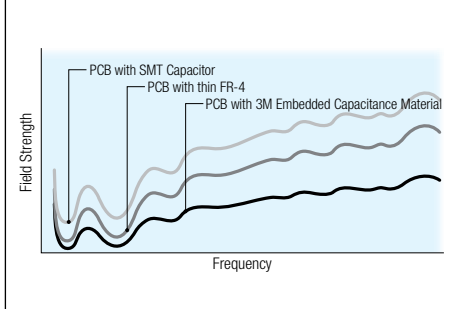

3M™ Embedded Capacitance Material

Property	Test Method	11 µm	14 µm	19 µm
Dielectric Thickness	Cross-section	11 µm (0.43 mils)	14 µm (0.55mils)	19 µm (0.75 mils)
Capacitance/Unit Area (1 kHz)	Supplier Method	8.1 nF/in ² (1.25 nF/cm ²)	6.4 nF/in ² (1.0 nF/cm ²)	6.0 nF/in ² (0.9 nF/cm ²)
Capacitance Tolerance	Supplier Method	+/- 10%		
Dielectric Constant (1 kHz)	Supplier Method	16	16	20
Dissipation Factor (1 kHz)	Supplier Method	0.005	0.005	0.006
TCC	Supplier Method	Meets X7R requirements		
Dielectric Strength (Volts/Mil)	ASTM D149	3300		
HiPOT Insulation Resistance (Megaohm)	IPC-TM-650 2.5.7.2	100 min. at 100V DC (100% tested)		
Breakdown Voltage (Volts)	IPC-TM-650 2.5.7.2	>100		
UL Flammability Rating	UL 94	94 V-0		
UL Relative Thermal Index	UL 796	130°C		
UL Solderability Limits	UL 796	288°C/30 sec		
Glass Transition Temperature	Supplier Method (DSC)	120°C		
Moisture Absorption (wt %)	ASTM D570	0.11		
CTE (ppm/C)	Supplier Method	32 (x,y,z)		
Degradation Temperature	IPC-TM-650 2.3.40	360°C		
Peel Strength (pli)	IPC-TM-650 2.4.9 modified	3.8	3.8	6.0
Thermal Conductivity (W/m*K)	ASTM E1530	0.39		
Youngs Modulus (MPa)	Supplier Method (DMA)	1377		

All test data provided are typical values and not intended to be specification values.

*“RoHS compliant” means that the product or part does not contain any of the following substances in excess of the following maximum concentration values in any homogeneous material, unless the substance is in an application that is exempt under RoHS: (a) 0.1% (by weight) for lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers; or (b) 0.01% (by weight) for cadmium. Unless otherwise stated by 3M in writing, this information represents 3M’s knowledge and belief based on information provided by third party suppliers to 3M.

For more information, please visit our website to learn more: www.3Mcapacitance.com

3M is a trademark of 3M Company.

Important Notice

All statements, technical information, and recommendations related to 3M’s products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M’s current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of one year from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M’s option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.



Electronic Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000
1-888-845-3393
www.3Mcapacitance.com

Please recycle. Printed in USA.
© 3M 2009. All rights reserved.
80-0011-3700-1